

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 March 2005 (24.03.2005)

PCT

(10) International Publication Number
WO 2005/025822 A1

(51) International Patent Classification⁷: **B27B 17/00**

[SE/SE]; Ravingatan 10 B, S-556 28 Jönköping (SE).
BERGQUIST, Oskar [SE/SE]; Starrgatan 9B, S-554 50
Jönköping (SE).

(21) International Application Number:
PCT/SE2004/001217

(74) Agent: **SCHMERER, Sven, Erik**; AB Electrolux, Group
Intellectual Property, S-105 45 Stockholm (SE).

(22) International Filing Date: 19 August 2004 (19.08.2004)

(25) Filing Language: English

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(26) Publication Language: English

(30) Priority Data:
0302439-5 12 September 2003 (12.09.2003) SE

(71) Applicant (*for all designated States except US*): **AK-
TIEBOLAGET ELECTROLUX** [SE/SE]; S-105 45
Stockholm (SE).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **KULLBERG,
Stefan** [SE/SE]; Ståltorpsgatan 15, S-553 31 Jönköping
(SE). **ROGERSTEN, Roger** [SE/SE]; Konsistoriegatan
13, S-582 34 Linköping (SE). **MARTINSSON, Pär**

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: THROTTLE CONTROL DEVICE FOR A HAND HELD TOOL

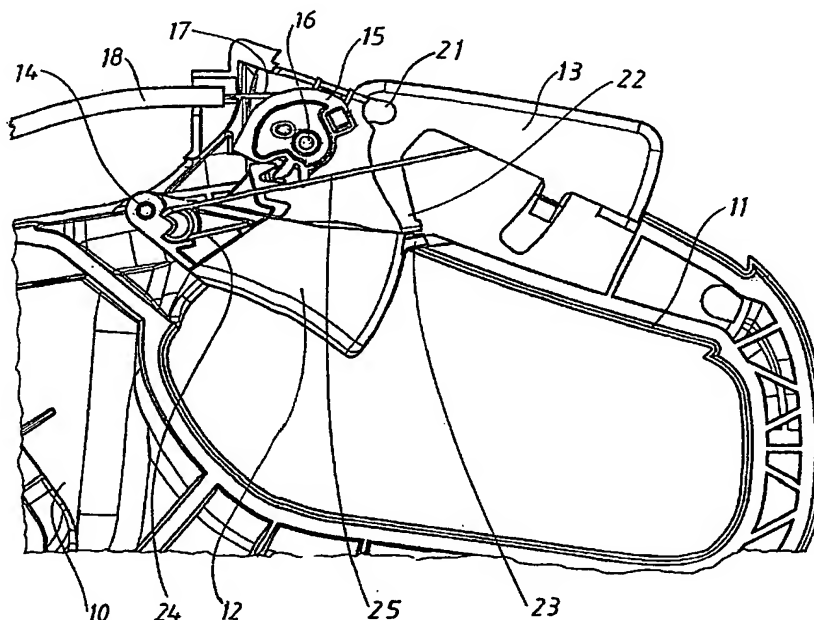

(57) Abstract: This invention relates to a throttle control device for a hand held tool, such as a chain saw. The tool is provided with a forwardly extending wire (17) for transmitting a motion from a throttle control lever (12) turnably arranged about a first axis (14) to a throttle valve. One end of the wire is secured to a wire arm (15) that is turnably arranged about a second axis (16). The wire arm is provided with one or several teeth (19, 20) cooperating with corresponding means on the throttle control lever (12) and the second axis (16) is arranged behind the first axis (15).



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*